

RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer.

The models detailed on this sheet are 4 burner gas ranges on gas or electric oven with cast iron grid .



200102

N 900

4 BURNERS GAS RANGES - cast iron grids **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

◆ Burners with optimized combustion interchangeable on site, flame failure device and protected

pilot light:

- 60 mm burners with continuous power regulation from 1,5 to 6 kW.
- 100 mm burners with continuous power regulation from 2,2 to 10 kW
- ◆ Manual ignition of the top burners and piezo ignition for the oven


◆ Electric oven with switch knob to control top and bottom heating elements. Oven thermostat with temperature markings in °C adjustable from 110° to 285°C.

TECHNICAL DATA				
CHARACTERISTICS	MODELS			
	NCFG800C 200152	NCFG801C 200157	NCFGE800C 200156	NCFG802C 200164
Power supply	Gas	Gas	Gas/Electric	Gas
External dimensions - mm				
width	800	800	800	800
depth	900	900	900	900
height	850	850	850	850
height adjustment	50	50	50	50
Oven cavity - mm				
width	575	575	575	575
depth	700	700	700	700
height	300	300	300	300
Oven				
temperature min-max - °C	120, 280	120, 280	110, 285	120, 280
heat input - kW	8.5	8.5	6	8.5
Back burner dimensions - mm	Ø 60, Ø 100	Ø 100, Ø 100	Ø 60, Ø 100	Ø 60, Ø 60
Back burners power - kW	6, 10	10, 10	6, 10	6, 6
Front burners dimension - mm	Ø 60, Ø 60	Ø 100, Ø 100	Ø 60, Ø 60	Ø 60, Ø 60
Front burners power - kW	6, 6	10, 10	6, 6	6, 6
Net weight - kg.	155	155	155	155
Supply voltage			400 V, 3N, 50/60	
INCLUDED ACCESSORIES				
2/1 GN CHROME GRID	1	1	1	1

- ◆ Gas oven with stainless steel burners, self-stabilizing flame positioned beneath the base plate and a thermostat adjustable from 120° to 280°C.
- ◆ Worktop in 20/10 304 AISI stainless steel. Front and side panels in 304 AISI stainless steel with Scotch Brite finish.
- ◆ All models have right-angled side edges to allow flush-fitting joins between units eliminating gaps and possible dirt traps.
- ◆ 430 AISI oven chamber with 3 levels of runners to accommodate 2/1GN shelves.
- ◆ Ribbed, cast-iron oven base plate.
- ◆ Inside door panel in 430 AISI stainless steel.
- ◆ Stainless steel feet adjustables up to a height of 50 mm.
- ◆ Handles on the oven in 304 AISI stainless steel.
- ◆ Cast iron grids.
- ◆ Main connections can be via the base of the unit.
- ◆ All models provided with service duct to facilitate installation
- ◆ All gas appliances are supplied for use with natural gas, with LPG conversion jets supplied as standard.
- ◆ Models NCFGE800T, NCFG800T and NCFG800T are the town gas versions.
- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ All models can be installed on cantilever system.
- ◆ IPX5 water protection.

OPTIONAL ACCESSORIES				
ACCESSORIES	MODELS			
	NCFG800C 200152	NCFG801C 200157	NCFGE800C 200156	NCFG802C 200164
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181	206181	206181
2 SIDE COVERING PANELS H=700 D=900	206134	206134	206134	206134
2 SIDE KICKING STRIPS	206180	206180	206180	206180
2 SIDE KICKING STRIPS F.CONCRETE INSTAL.	206157	206157	206157	206157
2/1 GN CHROME GRID	164250	164250	164250	164250
4 FEET FOR CONCRETE INSTALLATION	206210	206210	206210	206210
4 WHEELS (2 WITH BRAKE)	206188	206188	206188	206188
DRAUGHT DIVERTER WITH 120 MM DIAMETER	206126	206126	206126	206126
FLANGED FEET KIT	206136	206136	206136	206136
FLUE CONDENSER FOR 1/2 MOD. DIAM.120MM	206155	206155	206155	206155
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.200 MM	206146	206146	206146	206146
FRONT.KICK.STRIP F.CONCRETE INST.400 MM	206147	206147	206147	206147
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148	206148	206148
FRONTAL HANDRAIL 1200 MM	206191	206191	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192	206192	206192
FRONTAL HANDRAIL 400 MM	206166	206166	206166	206166
FRONTAL HANDRAIL 800 MM	206167	206167	206167	206167
FRONTAL KICKING STRIP 1000 MM	206177	206177	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179	206179	206179
FRONTAL KICKING STRIP 200 MM	206174	206174	206174	206174
FRONTAL KICKING STRIP 400 MM	206175	206175	206175	206175
FRONTAL KICKING STRIP 800 MM	206176	206176	206176	206176
JUNCTION SEALING KIT	206086	206086	206086	206086
LARGE HANDRAIL(PORIONING SHELF)400 MM	206185	206185	206185	206185
LARGE HANDRAIL(PORIONING SHELF)800 MM	206186	206186	206186	206186
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234	206234	206234	206234
PRESSURE REGULATOR FOR GAS UNITS	927225	927225	927225	927225
REAR FLUE UPSTAND FOR SMALL CHIMNEY	206159	206159	206159	206159
SALAMANDER SUPPORT+SLIDING TRAY 400MM	206193	206193	206193	206193
SIDE HANDRAIL-RIGHT/LEFT HAND	206165	206165	206165	206165
SINGLE BURNER RADIANT PLATE	206170	206170	206170	206170
SINGLE BURNER RIBBED PLATE	206172	206172	206172	206172
SINGLE BURNER SMOOTH PLATE	206171	206171	206171	206171
STAND/SUPPORT 400 MM	206183	206183	206183	206183
STAND/SUPPORT 800 MM	206184	206184	206184	206184
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154	206154	206154	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137	206137	206137



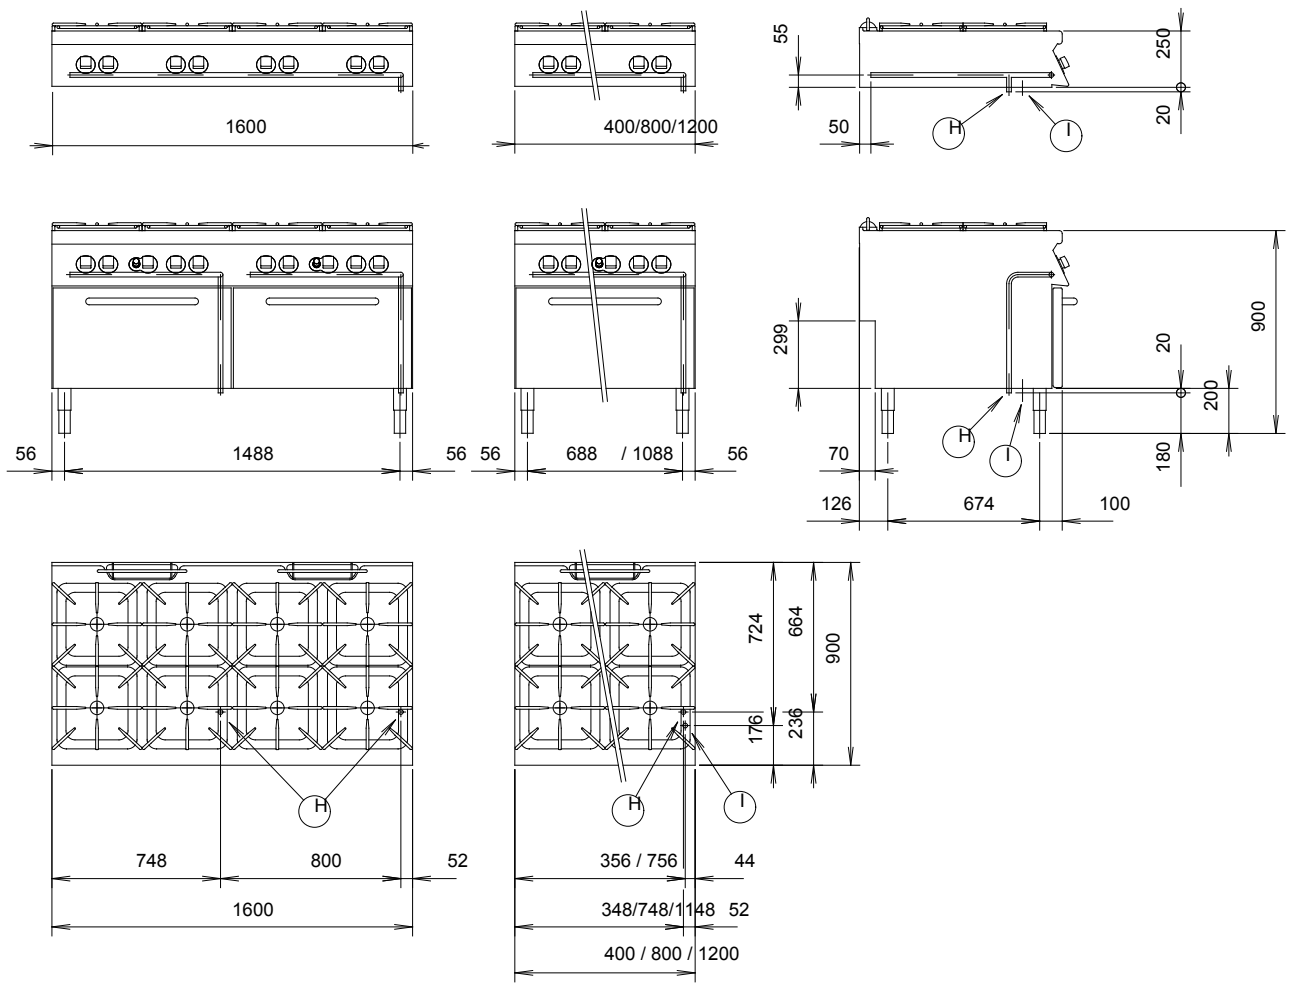

LEGEND

	NCFG800C 200152	NCFG801C 200157	NCFG800C 200156	NCFG802C 200164
H - Gas connection	1/2"	1/2"	1/2"	1/2"
I - Electrical connection			400 V, 3N, 50/60	



www.zanussiprofessional.it