


TECHNICAL CHARACTERISTICS OF KM 03 MACHINES:

- 3 Self-cleaning tanks
- Automatic transfer of solvent from tank to tank
- Advanced Filtration System ®
- Decolouring Filter
- Pulsar 3 ® microprocessor with memory for up to 20 programmes, manual override, self-diagnosis and memory card
- P16 supplementary keyboard
- Maintenance Guard ®, automatic maintenance programmes
- Inverter for regulating motor speed
- Closed circuit with heat pump
- Polar ®, automatic solvent cooling system
- Advanced Fractional Distillation ® under vacuum
- Automatic still wall washing
- Steam traps (steam versions)
- Dry Guard 2 ®, automatic drying monitor
- Water-saving valve
- Dry Rapid ®, revolutionary drying system
- Enlarged loading door and still opening
- DCP ®, automatic suction detection system
- Safety Nitrogen System
- noise jacket for refrigerator compressor.
- Air-operated interlocks and micro-switches on all doors
- Large button trap with automatic drying system
- Soap pump
- Large refrigerator unit
- Large double air filter
- Air-operated electrical panel opening (Realstar exclusive)
- Floor Guard ®, safety tray
- Stainless steel parts: air vent, basket, button trap, filters, still, condenser, separator

A FEW OF THE OPTIONALS AVAILABLE:

- air compressor
- self-cleaning air filter
- electric or steam heated version

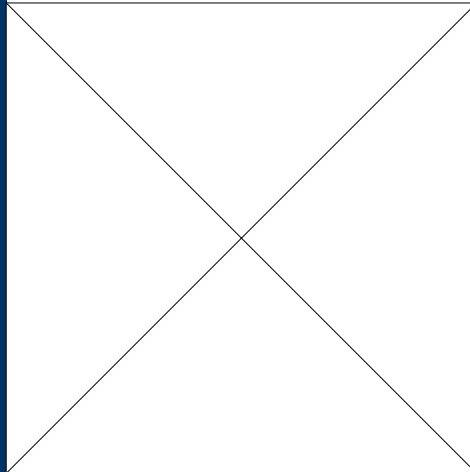

DRUM: Capacity kg 40-45 / Volume lt 802 /
Diametre mm 1200 / Depth mm 710/ Wash speed
rpm 12-50 / Extract speed rpm 300- 540 / Door
Diametre mm 600.

TANKS: 1° lt 240 / 2° lt 240 / 3° lt 330

DISTILLATOR: Capacity lt 360

NYLON FILTER: Capacity lt 100 / Surface m² -
1,2

CARTR FILTER.: Capacity lt 26 / Cartridges 2

POWER: Inst. Power (steam) 17,4

CONNECTIONS: Air Ø 1/4" / Water Ø 3/4" /
Steam Ø 1/2"

WEIGHT: Net Kg 2950/ With solvent Kg 3600 /
Dinamic charge Kg m₂ 1242

DIMENSIONS: A mm 2360 / B mm 2025 / C mm
2580

